

## Product Description

Vibra-Tite 122 Oil Tolerant Threadlocker is a medium viscosity, thixotropic, anaerobic thread locking adhesive for all types of metal, threaded fasteners. Cured performance shows controlled medium strength with good temperature and solvent resistance against water and nonpolar solvents. This product cures rapidly on plated, oily, metal surfaces or inactive surfaces.

## Typical Applications

Replaces lock washers and plastic inserts. Locks machine tool access bolts, studs, and hydraulic system bolts. Used on gear box bolts/drive shaft, bearing cover cap screws, counter sunk screws, conveyor roller bolts and construction equipment.


## Technical Features

Resin: Modified acrylate  
 Color: Blue  
 Fixture Speed w/Primer: <1 seconds  
 Fixture Speed w/o Primer: 5-10 min @ 77°F  
 Viscosity: 2250-12000 cps  
 Gap Fill: 0.0015"  
 Max. Operating Temp: -65°F to +300°F

## Typical Curing Performance

### Cure Speed

The cure speed is dependent on temperature and substrate. The graph below shows the Breakaway Strength on M-10 Steel, Phosphate/oil, and Zinc finishes.

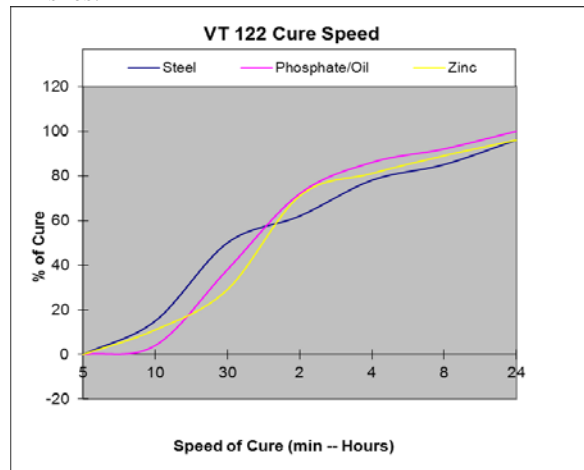

## Performance of Cured Material

	Typical Values
Fixture Time	10-20 min @ 72°F
Full Cure Time	24 hrs @ 72°F
Temperature Range	-60°F to 300°F (-51°C to 150°C)

### Breakaway Strength

3/8" Plain Steel nut and bolt @ 1 hr	50-150 lb <sub>f</sub> -in
3/8" Plain Steel nut and bolt @ 24 hr	100-170 lb <sub>f</sub> -in
3/8" Zinc nut and bolt @ 24 hr	120-170 lb <sub>f</sub> -in
3/8" Phos-oil nut and bolt @ 24 hr	120 - 170 lb <sub>f</sub> -in

## Environmental and Fluid Resistance

(Shear strength values after 1,000 hours.)

	Typical Values
Heat age @ 150°C	100%
Engine oil @ 150°C	100%
Brake fluid @ 150°C	100%
ATF @ 150°C	85%
50/50 water/ ethylene glycol @ 120°C	85%
Water @ 100°C	80%
Gasoline @ 25°C	95%
Diesel fuel @ 25°C	100%
Ethyl Alcohol @ 25°C	95%

## General Information

### Storage

Product should be stored in a cool and dry location at temperatures between 14°F (-10°C) to 86°F (30°C). Shelf life is 2 years from date of manufacture when stored at 72±8°F (22±4°C).

### Instructions for Use

Although this threadlocker is oil tolerant, for best performance, clean and dry parts to minimize the amount of surface oil and grease before applying product.

### Compatible Primers

Primers such as Vibra-Tite Excel 611 (Primer N) or Excel 612 (Primer T) can be used. The use of primers can result in lower strength and performance should be tested after full cure.