

Product Description

Vibra-Tite S567 is a high temperature, high strength, anaerobic retaining compound stick designed for metal cylindrical assembly applications. The product performs on aluminum, steel, plated, stainless steel, and special alloy parts. S567 exhibits outstanding temperature and solvent resistant.

Typical Applications

Vibra-Tite S567 locks shaft and hubs together for gears, bearing, and bushings. Vibra-Tite S567 bonds pins, adaptors, plugs.

Properties of Uncured Material

Chemical Type	Methacrylic Ester
Cure Type	Anaerobic
Secondary Cure	Activator
Percent Solids	100
Color	Green
UV Fluorescent	Yes
Application	Retaining



Performance of Cured Material

Typical Values (Steel Pins & Collars)

Strength	High
Operating Range	-54°C to 232°C (-65°F-450°F)
Fixture Time	15 minutes
Ambient Strength 24 hour cure at 23°C Steel pins and collars	>2000 psi
Hot Strength 24 hour cure at 23°C 2 hours at 200°C Broken at 200°C	>2000 psi
Heat Aged Strength 24 hour cure at 23°C 2000 hours at 150°C Broken at 23°C	>4500 psi


Cure Speed

The cure speed is dependent on temperature and substrate. The graph below shows compressive shear strength on various common finishes at 25°C, using ASTM 4562. Static shear strength was measured on cylindrical parts with a 0.002" diametrical clearance.

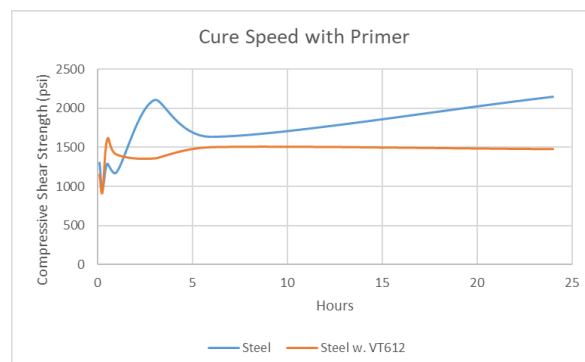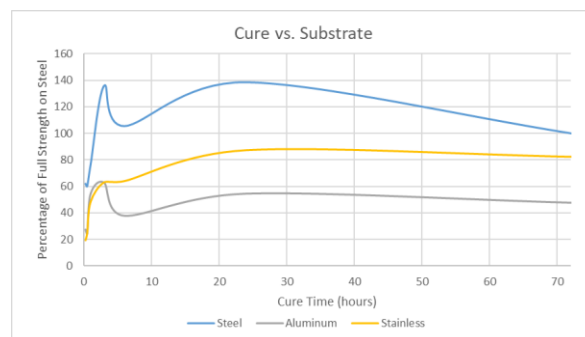


Hot Strength

Parts were cured for 24 hours then held at temperature for two hours. Compressive shear strength values were recorded for parts at temperature, using ASTM 4562 on steel substrates.

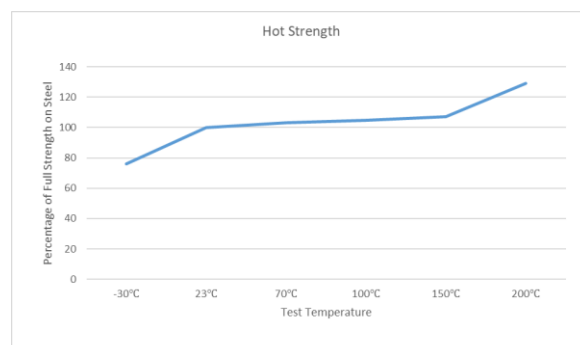



Heat Aging

Parts were allowed to cure for 24 hours then were aged at the reported temperatures. Compressive shear strength values were recorded at room temperature using ASTM 4562 on steel substrates.

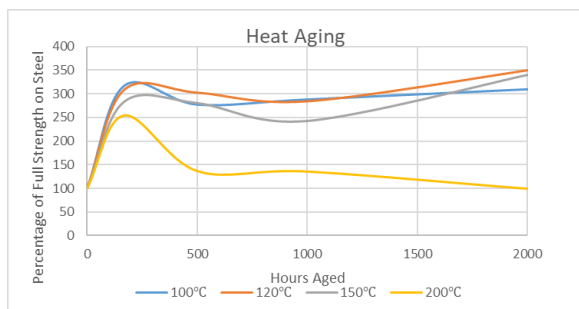

Fluids Testing

Parts were allowed to cure for 24 hours then were submerged in the listed fluid(s) at the reported temperatures. Compressive shear strength values were recorded at room temperature, using ASTM 4562 on steel substrates.

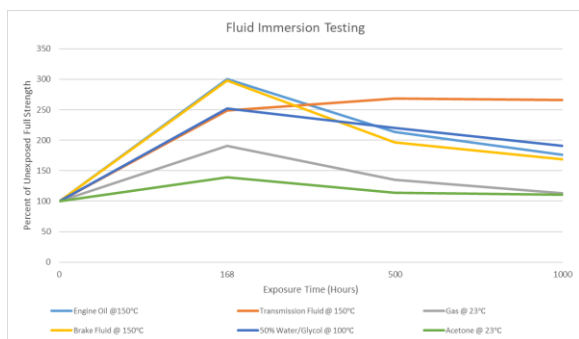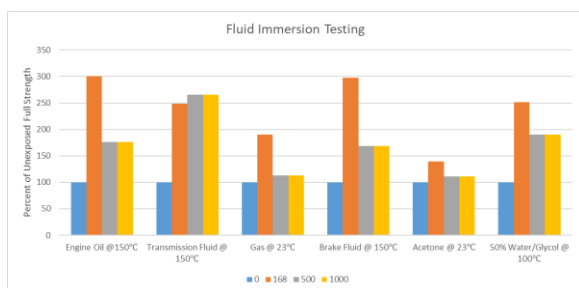

Instructions for Use

For best results, ensure parts are clean, dry and free from oil and grease. Anaerobic adhesives cure in the presence of metal and the absence of oxygen. Residual adhesive outside of the bond area will remain liquid and is not indicative of product failure. For optimal performance, allow the material to cure for at least 24 hours prior to use when possible.

Compatible Primers

Primers such as Vibra-Tite Excel 611 (Primer N) or Excel 612 (Primer T) can be used to speed the fixture time of the adhesive. Fixture times can improve by as much as 50%. The use of primers can result in lower strength and performance should be tested after full cure.

General Information

Storage

Product should be stored in a cool and dry location at temperatures between 8°C to 21°C. Shelf life is 2 years from date of manufacture when stored at 72±8°F (22±4°C). Storing above this temperature will result in a lower shelf life.

Shelf life of this product is 6 months when storing in quantities ≥ 2 liters. Refrigerate the material or download the material into smaller containers to extend the shelf life.

Note

Vibra-Tite S567 is color coded green and once cured, seals and vibration proofs the assembly, giving high compressive shear strength. The high strength of this material may require heat and/or solvent to disassemble.

Health & Safety in use

IRRITANT: Contains Methacrylate Esters which may irritate eyes, respiratory organs and skin. In case of contact with the skin, wash immediately with plenty of water.